

High flow rate, high efficiency flanged circulating pumps

DN 40



Energy Efficiency Index < 0,23



2-YEAR WARRANTY



Art. P079.18

18 mt.


30 m³/h

Art. P079.18 - ANTARES type "AlfaMega" 40 flanged DN 40, wet rotor, high efficiency circulating pump. Single-phase, 230 Vac with frequency modulation. Cast-iron body.


With proportional pressure control, constant pressure control.

Item code	Type	Max. head mt	Max flow rate m³/h	Power W	Height mm.
P079.18	AlfaMega 40/18	18	30	670	250

Dimensions

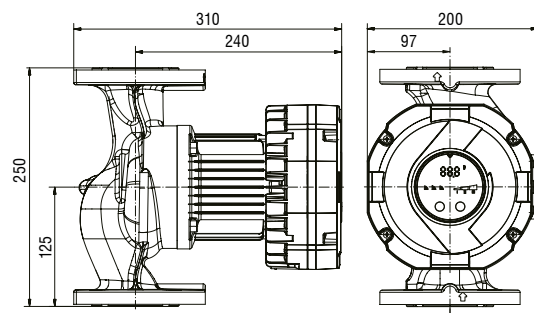

Performance curve Art. P079.18

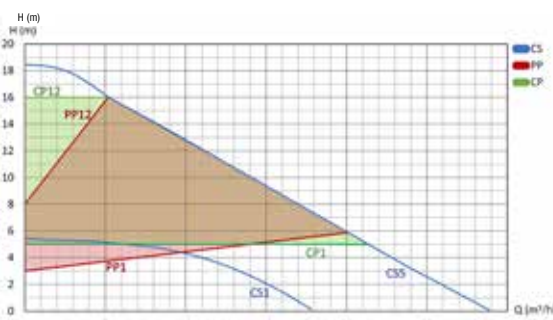

For additional info on interchangeability



uk@antaresint.com



DN 50



Energy Efficiency Index < 0,23



2-YEAR WARRANTY



Art. P080

18 mt.

8 mt.

38 m³/h


28 m³/h

Art. P080 - ANTARES type "AlfaMega" 50 flanged DN 50, wet rotor, high efficiency circulating pump. Single-phase, 230 Vac with frequency modulation. Cast-iron body.

With proportional pressure control, constant pressure control, constant flow rate control.

Item code	Type	Max. head mt	Max flow rate m³/h	Power W	Height mm. L
P080.08	AlfaMega 50/8	8	28	330	240
P080.18	AlfaMega 50/18	18	38	850	280

Dimensions

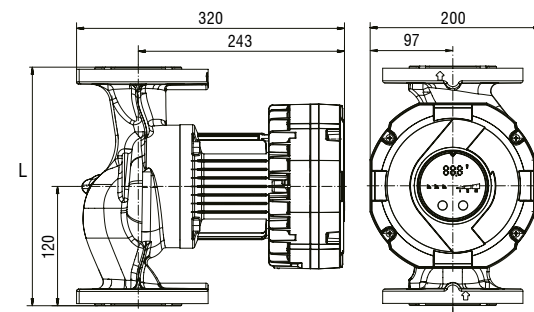

Performance curve Art. P080.xx

